

Thanks to its flexible features, which meet any type of installation requirements, it is the most functional equipment on the market made of a folded steel plate.

It is interesting to note that the upper slots allow placing of the stringers along the whole length of the support shelf to which they will be fixed.

Electrolyte protection


The supports are totally coated with white epoxy powder.

Coding and packing


The supports are packed inside easy to identify boxes with codes corresponding to the configuration on this page.

Each box has 2 supports, left and right, 4 isolators of ABS/GF.

Four laminated shims are included in the box. They can be used for the shelf in case the floor is not perfectly flat.

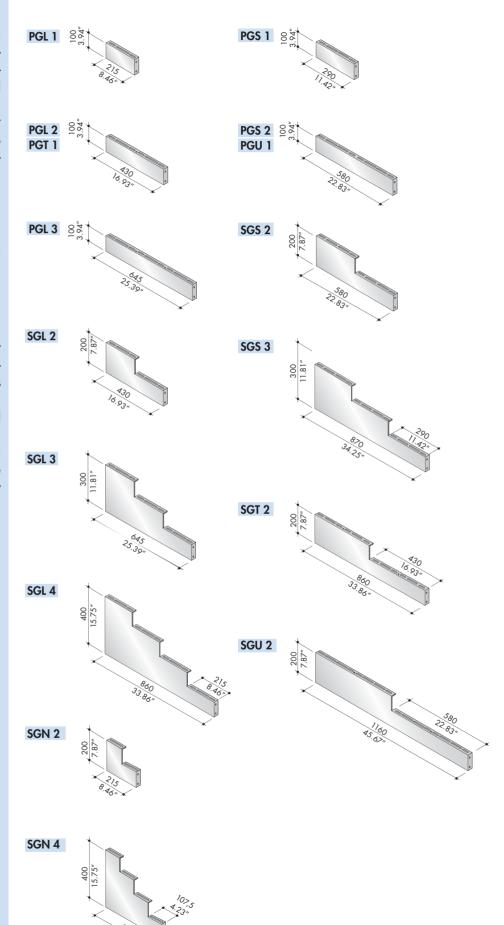

STRINGERS

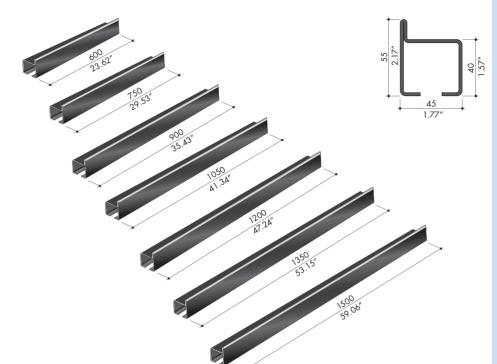


"h" type standard stringers

These are made of cold shaped steel sections.

The section have dimensions ranging from 45x55 mm. (1.77"x2.17").

The upper profile of the stringers permits the alignment of the elements during installation of the battery and it also avoids any incidental lateral displacement.

The lower slot allows easier longitudinal and transversal pairing of the supports.

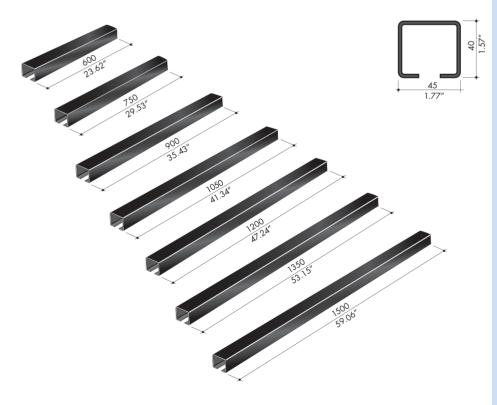

"C" type additional stringers

The section has a dimension of 45x40 mm. (1.77"x1.57") and a flat upper support surface.

These stringers can be placed in parallel between the standard pairs if you need to increase the support surfaces and capacity of the rack.

Coating

Electrolyte protection and electrical insulation: black polyethylene.

Packing and coding

The stringers are packed into boxes. Each of the four lenghts is packed in 4 or 6 pieces; fastening material are included. Codes are given according to the length and quantity of each box. Example: code n°906 identifies a pack of 6 stringers having a length of 900 mm. Therefore, the first 2 No's of the code indicates the length, the last one the quantity.

ONE TIER RACKS

These racks have been designed for all types of stationary battery models. In designing these easy-to-use racks, all main requirements, such as, strength, flexibility, acid-proof protection have been considered. These racks are light, small and easy to move and store.

Furthermore, these racks are available at anytime because they are always in stock.


These racks can be totally disassembled and assembled by using screws and plates.


The main parts consist of stringers and supports.

To anchor the rack to the floor are available:

FIXO01 kit for one tier supports FIXOO2 kit for tubular multi-tier supports.



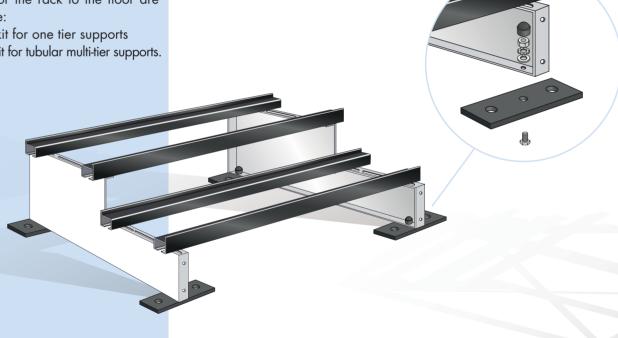

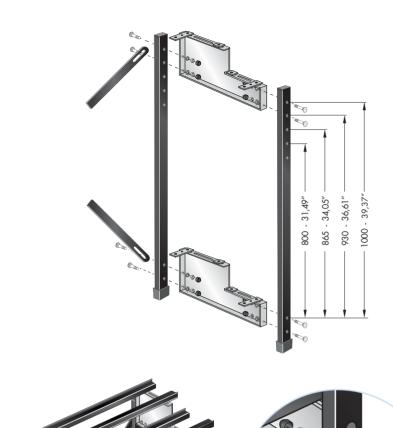

TWO TIER RACKS

The two-tier rack is the extension of the single-tier rack, whose components, stringers and supports can be used with special additional sets coded 1002.

Additional sets are necessary in order to permit overlaying the two tiers.

The upper support can be mounted at an appropriate height for the battery to be installed.


Supporting stand

The profile is steel tube, the section is 50×30 mm. (1.97" \times 1.18"). Electrolyte protection: black polyethylene.

Braces

Steel bars section 30 x 3 mm. (1.18" x 0.12").

Electrolyte protection: black epoxy powder.

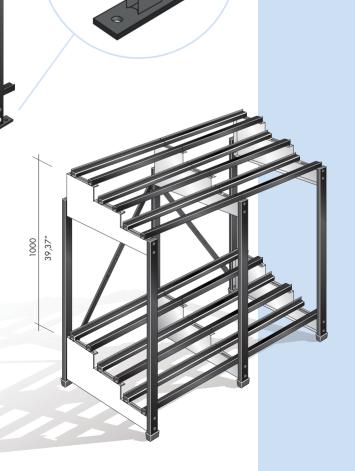

STANDARD RACKS


CERTIFIED EARTHQUAKE PROOF BATTERY RACKS


This modular rack system is based on the components of the standard rack system.

By using of some additional components, such as stands, braces, telescopes and end holders it is possible to build a seismic rack.


Dependence on the battery size and at corresponding choice of the rack components, racks can be created with an earthquake safety according to the customer demands.


The complete range of the usual earthquake loads plus the demanded security factors can be covered. The racks are appropriate for use as earthquake proof battery racks in USA, according to UBC and IBC.

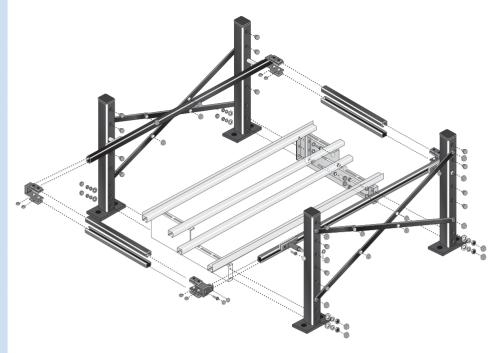

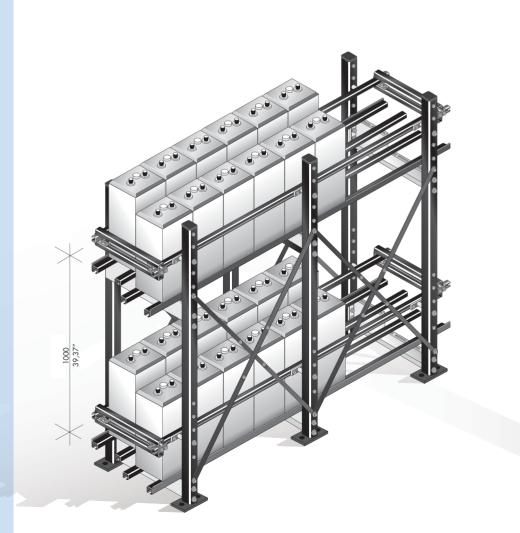

ET0072 ET0102



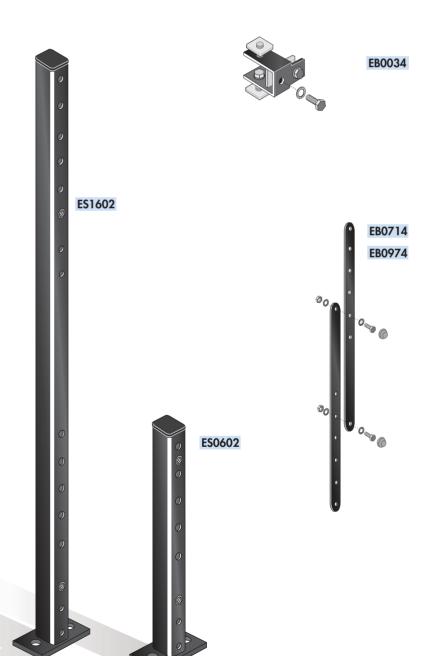

SEISMIC KITS

Supporting Stand ES0602 - ES1602

An extra heavy design of supporting stands guarantees a sufficient strength for seismic loads. Two different heights of stands make the construction of one two tier rack possible.

Brace EB0714 - EB0974

The braces guarantees a high stability in the lengthwise direction.


TELESCOPE ET0072 - ET0102

The telescope has an adjustment range of 45 mm. (1,77"). It takes over the lateral support of the cells together with the railing.

End holder EB0064 - EB0034


End Holders are adjustable and it takes over the lengthwise support of the cells package together with the railing.

Stand, brace, telescope and end holder are coated with epoxy powder.

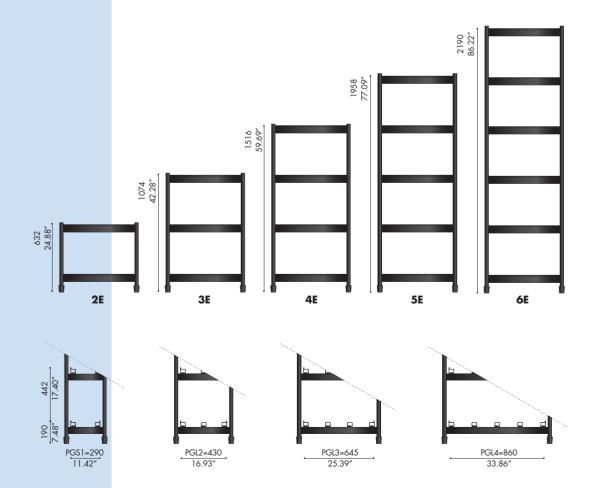

RACKS FOR HORIZONTAL BATTERY INSTALLATION



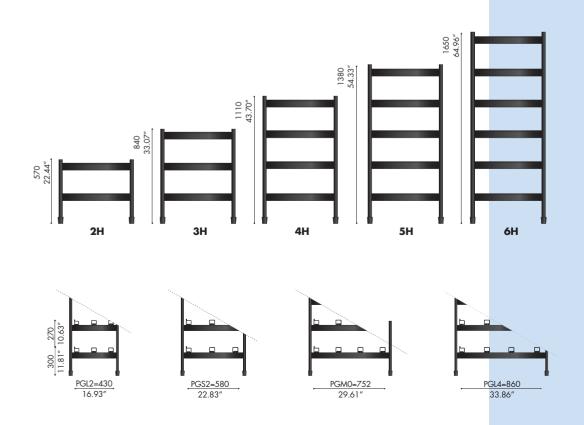

CLADDED RACKS

The **passoni alpha** cladded racks systems have been designed for the main types of stationary battery models.

The basic module is our standard battery rack including the modular cladded panels.

The cladding parts are realised in a thermoplastic compound, based on the following characteristics.

- Shock resistance according to IK 10 EN 50102
- Dielectric strength 6 kV according to EN 60950 and EN 50272-2
- Fire protection UL 94V0/ISO 1210
- Ageing according to XP C 20-540
- Chemically stable against sulphuric acid
- Chemically stable against potassium hydroxide
- Colour: RAL 7035, Light Grey
- ISO 9001





SOFTWARE SERVICE

The **AlphaSYS**® rack-sizing program features seismic and non-seismic battery racks.

You can easily search the program for a quality battery rack that will meet the needs of your clients.

AlphaSYS® software is available, free of charge to our customers.


Available as PC, Web or Smartphone version.


Please visit our webpage for more information about the AlphaSYS® and how to get your own software.

www.alpha-passoni.com www.passoni-alpha.com

Use this QR-code with your Smartphone for a quick review.



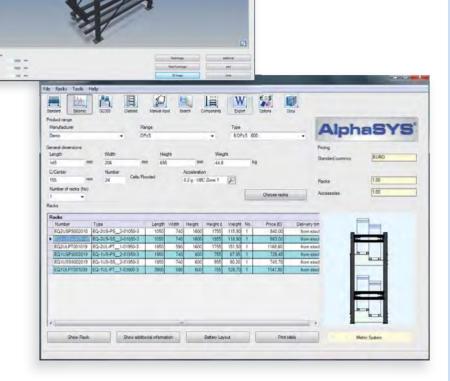

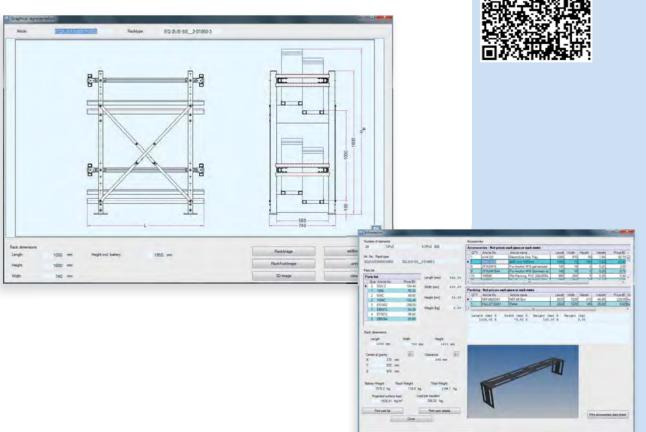

CUSTOMIZED RACKS

Beside the standard and seismic rack systems that are offered in series, we build a variety of special constructions for extreme cases, such as container, off-shore, power and nuclear power stations or military utilities.

These racks are designed, calculated and built, according to the specific customer requirement.

In quite special cases mechanical shock absorbing system are used.

alpha takes seismic and shock design criteria seriously.

For every construction a static calculation is carried out internally.

When required these racks are subject to a static calculation or computer simulation by an external, neutral expert authority, or being physically tested.

These racks are used worlwide.







POWER PLANT RACKS SHAKING TEST






RACKS FOR MARINE VESSELS



RACKS FOR MILITARY UTILITIES

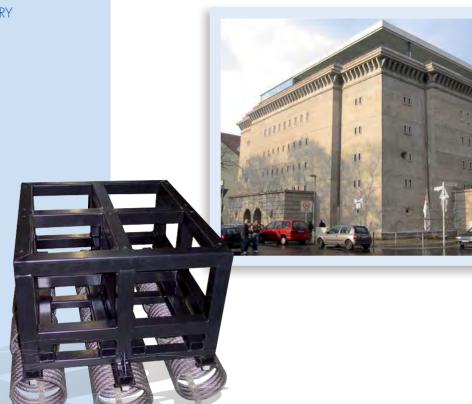

RACKS FOR OFF-SHORE INSTALLATIONS





III

passoni aleha





CERTIFICATE OF APPROVAL

EARTHQUAKE PROOF RACKS FOR STATIC BATTERIES MANUFACTURED BY

Passoni Paolo e figli S.r.l. Via Aristotele, 32 20047 Brugherio (MI) – Italy

alpha industrie-bedarfs gmbh Hüttenstraβe, 5 67550 Worms - Germany

The earthquake proof racks for static battery installation produced by Passoni alpha are hereby approved for use in California, in earthquake zone 4 as defined by the UBC 1997 and IBC 2003. This approval is based on a thorough review of the report entitled "static calculation-racks for earthquake proof battery installation" produced by:

Kühne BSB GmbH Hirschbachstr. 70 D-64354 Reinheim, Deutschland

and collateral linear static stress and critical buckling load analysis performed by our engineers.



21 March, 2005 No. 2005-32





CERTIFICATE No. 0 9397 02

on the approval of a static calculation

The static calculation:

racks for earthquake proof battery installatio (Gestelle für erübebensicheren Batterieeinbau) Date 07,100,3,26 pages + 5 annexes Kühne BSB GribH Hirschbachstr. 70 D-64354 Reinheim, Deutschland

Passoni Paolo e figli S.r.i Via Aristotele, 23 I 20047 Brugherio (Mi)-Italia

aipha industrie-bedarfs gmbh Niedesheimer Strafie 26 D 67550 Worms, Deutschland

was approved with respect to static design. The sade are appropriate for use an embrguate month destinates in UEA, estimated assets. 4.1 The approval was used to some change on DN 18800. DIN 4140, the Uniform Building Code ed. 1997 and the International Building Code ed. 1997 and the International Building Code ed. 1997 and 2009. This conflictate holds in connection with the RNVTIV-report of approval no. 0 9397 02. does no. 3.4.3370 mer, dated Feb. 67, 2004.

Essen, 2010-06-10

TÜV NORD SysTec GmbH & Co. KG



EEI

CERTIFICATE OF APPROVAL

EARTHQUAKE PROOF RACKS FOR STATIC BATTERIES MANUFACTURED BY

Passoni Paolo e figli S.r.I Via Aristotele, 32 20047 Brugherio (MI) – Italy

alpha industrie-bedarfs gmbh Hüttenstraβe, 5 67550 Worms - Germany

he earthquake proof battery racks produced by Passoni alpha are hereby approved for ompliance with the following Bulding Codes:

2007 California Bulding Code - CDC

2006 International Bulding Code - DBC

2006 International Bulding Code - IBC

2005 IEEE sid 693 - Annex |

IEEE Recommended Tractice for Seismic Design of IEEE side 693 - Annex |

IEEE and the commended that is the commended of the



ENGINEERING

Kent Bingham

18 May, 2008 No. 2008-09









USA 6257427B1
Europe 0976167
Czech Rep. 296298
Poland 190256
Hungary 222608
Ucraine 58541
Russia 2195748
China ZL 99800017.5

2,283,873

Canada

D 发明专利证书

专利号: ZL 99 8 00017.5 国际专利主分类号: H01M 2/10

IIISSIIII alpha

to change the specifications of these products without prior notice. Printed on 03/2018 - Rev. 04 by Publyteam

The company reserves the right