


# ABS CYCLIC SERIES

RELIABLE BATTERIES. EXPERT ADVICE. SINCE 1988



**abs**

AGM GEL

## ABS12-120C-DT

### FEATURES & BENEFITS

- Superior Cycle Life
- Deep Cycle AGM
- Advanced Carbon Technology
- Gel Filled for increased cycle life
- 99.99% virgin lead for grid plate
- Heavy duty grid/paste design for deep cycle application
- Maintenance free, non-spillable, valve-regulated
- Vibration Resistant
- Low self-discharge for longer shelf life



### ELECTRICAL SPECIFICATIONS

Voltage (V)	Capacity (Ah)				
	100 HR	20 HR	10 HR	5 HR	3 HR
12	130	118	113	107	98


### PHYSICAL SPECIFICATIONS

Dimensions (mm/inches)				Weight (kg/lbs)	Terminal Type (Standard)	Case Material
Length	Width	Height	Total Height			
330/12.99	173/6.81	212/8.35	237/9.33	31.7/69.9	DT (5/16")	ABS

Operating Temperature Range		
Discharge	Charge	Storage
-20°C ~ 55°C (-4°F ~ 131°F)	0°C ~ 40°C (32°F ~ 104°F)	-15°C ~ 40°C (-5°F ~ 104°F)

# ABS12-120C-DT

## DIMENSIONS

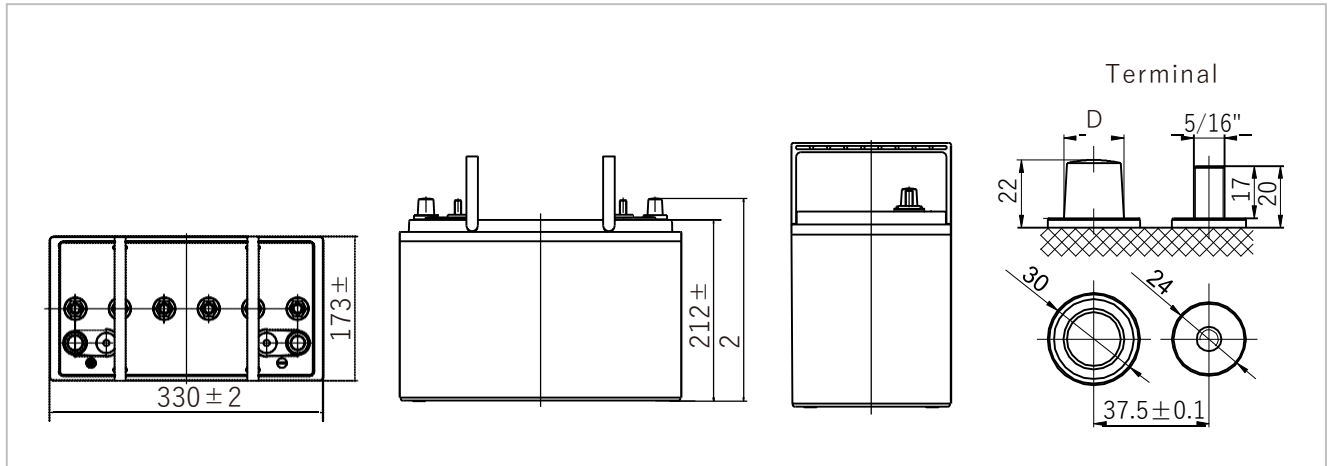

## PERFORMANCE CHARACTERISTICS

