


ABS CYCLIC SERIES

RELIABLE BATTERIES. EXPERT ADVICE. SINCE 1988



abs

AGM GEL

ABS6-350C

FEATURES & BENEFITS

- Superior Cycle Life
- Deep Cycle AGM
- Advanced Carbon Technology
- Gel Filled for increased cycle life
- 99.99% virgin lead for grid plate
- Heavy duty grid/paste design for deep cycle application
- Maintenance free, non-spillable, valve-regulated
- Vibration Resistant
- Low self-discharge for longer shelf life



ELECTRICAL SPECIFICATIONS

Voltage (V)	Capacity (Ah)				
	100 HR	20 HR	10 HR	5 HR	3 HR
6	385	350	332	305	285


PHYSICAL SPECIFICATIONS

Dimensions (mm/inches)				Weight (kg/lbs)	Terminal Type (Standard)	Case Material
Length	Width	Height	Total Height			
295/11.61	180/7.09	346/13.62	368/14.49	48.2/106.3	DT (3/8")	ABS

Operating Temperature Range		
Discharge	Charge	Storage
-20°C ~ 55°C (-4°F ~ 131°F)	0°C ~ 40°C (32°F ~ 104°F)	-15°C ~ 40°C (-5°F ~ 104°F)

ABS6-350C

DIMENSIONS

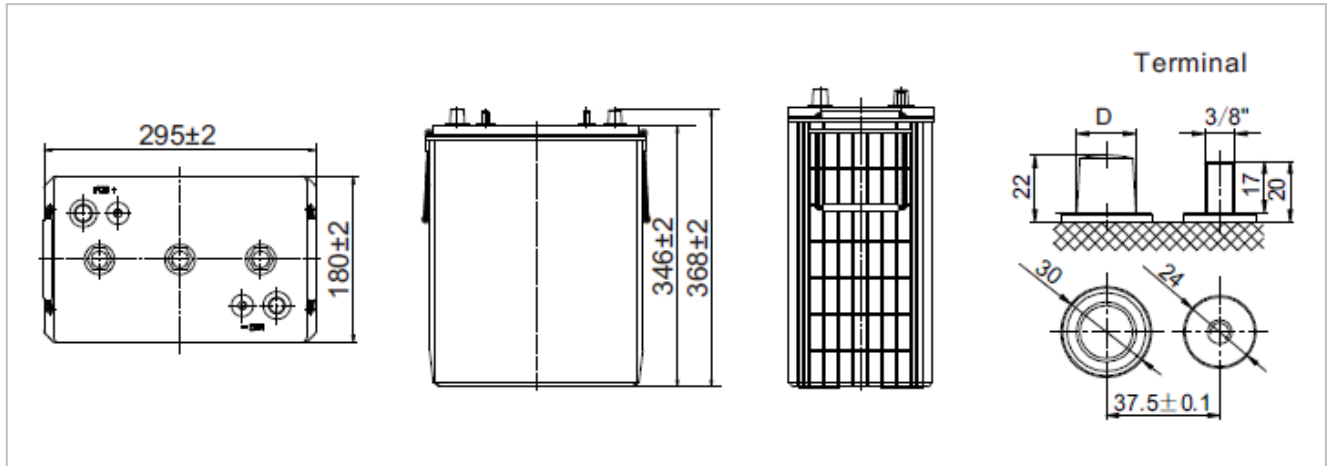

PERFORMANCE CHARACTERISTICS

